

FEMALE X FEMALE

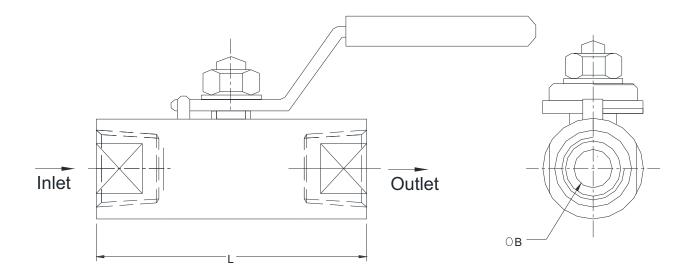

FLOW DIAGRAM



Inlet & Outlet	Max. Pressure Capacity						
	6000	PSI	10000 PSI				
Connections	L	ØB	L	ØB			
1⁄4" (F x F)	58	6.4	65	6.4			
3/8" (F x F)	60	8.5	68	8.5			
1/2" (F x F)	75	11.5	80	11.5			
¾" (F x F)	80	19	85	19			
1" (F x F)	87	25	95	25			
11/4" (F x F)	112	32	125	32			
11/2" (F x F)	120	38	135	38			
2" (F x F)	130	50	150	50			

NOTE: This drawing is a property of ITEC. Unauthorized copying, tracing and use of the drawing by any means without getting permission in writing from ITEC is prohibited. The drawing shall be returned in the "as it is" condition if it is damaged.	End-User					Our Ref.		
	Customer					Drawing No.		
	Project					Revision		
	Project No.				Date			
	Drawn by	TJ		Checked by	GP	Approved by	UV	
TOLERANCE : GENERAL	Product code	V201					11:1	
SCALE : NOT TO SCALE ALL DIMENSIONS ARE IN "mm"	Title	BALL VALVE					III	到